


Kondensator AUDIO AUDIO Capacitor

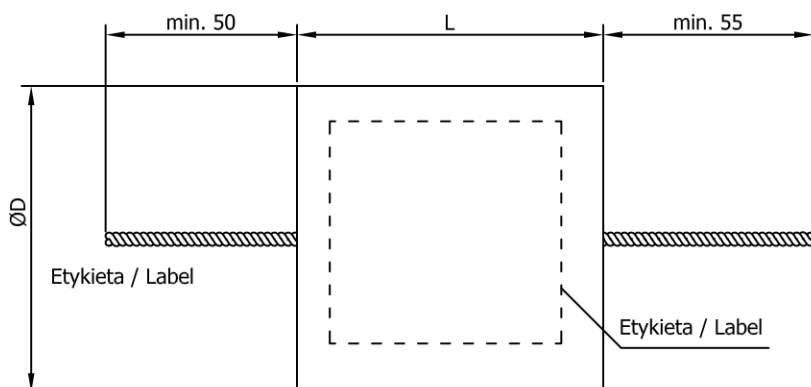

Pojemność znamionowa Rated capacitance	Tolerancja pojemności Capacitance tolerance	Wymiary / Dimensions	
		D+1	L+3/-2
μF	%	mm	mm

str. 2 / page 2

Dane Techniczne / Technical data:

Napięcie znamionowe
Rated voltage 250VDC

Tg kąta stratności
Dissipation factor <0,0035 @ 1kHz

Kategoria klimatyczna
Climatic category 25/70/21

Wymiary
Dimensions zgodnie z tabelą
acc. to table

(Uwagi/Notes)

1. Wyrób spełnia wymagania Dyrektywy RoHS (2011/65/WE).
This product fulfils the requirements of the RoHS Directive (2011/65/EC).

Description:

The KPAL-03 capacitors are made on the basis of paper and polypropylene dielectric films in a specially designed configuration. The capacitor section is impregnated with the use of a unique vacuum-based technology. The capacitor electrodes consist of solid aluminium foil. These capacitors feature housings formed from insulating resin paper tubes, terminals made of twisted tinned copper wire 2x0,8mm, and self-extinguishing potting compound of flammability class V0.

High quality and durability of the capacitors is assured by the use of carefully selected materials, production technology, as well as testing and measuring methods.



These capacitors are designed for use in audio equipment. The design of the capacitors and used technology during the production minimize the parasitic impedance components: inductance and resistance, resulting in improved quality of sound in a given audio system.

The capacitors are subjected to a series of specific tests and measurements, including a unique test using pulses of increased current amplitude and frequency of 22kHz.

The KPAL-03 capacitors can be used in d.c. and a.c. circuits within the temperature range of their climatic category. The d.c. voltage value or a.c. voltage amplitude should not exceed the specified rated voltage.

PRZYKŁADOWY NADRUK PRINTING LAYOUT EXAMPLE

Oznakowanie
okładziny zewnętrznej
- krótsze
wyprowadzenie /
Marking of the outer
electrode - shorter
terminal

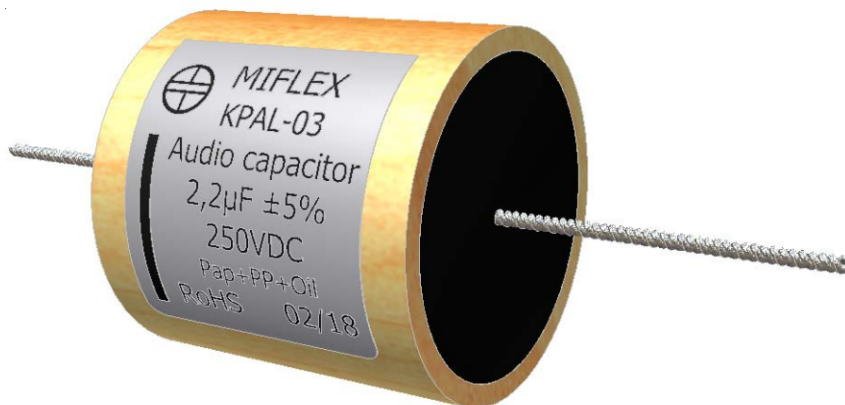

AUDIOMIFLEX

(+48) 509 85 30 10

audiomiflex.pl

Kondensator AUDIO AUDIO Capacitor

Kod EPD Ordering code	Pojemność znamionowa Rated capacitance	Tolerancja pojemności Capacitance tolerance	Wymiary / Dimensions	
			D+1	L+3/-2
-	μF	%	mm	mm
KPAL03F347...	0,047	J - $\pm 5\%$ K - $\pm 10\%$	20	40
KPAL03F356...	0,056			
KPAL03F368...	0,068			
KPAL03F382...	0,082		20	50
KPAL03F410...	0,10			
KPAL03F412...	0,12			
KPAL03F415...	0,15		22	50
KPAL03F418...	0,18			
KPAL03F422...	0,22			
KPAL03F427...	0,27		24	50
KPAL03F433...	0,33			
KPAL03F439...	0,39			
KPAL03F447...	0,47		26	50
KPAL03F456...	0,56			
KPAL03F468...	0,68			
KPAL03F482...	0,82		30	50
KPAL03F510...	1,0			
KPAL03F512...	1,2			
KPAL03F515...	1,5		36	50
KPAL03F518...	1,8			
KPAL03F520...	2,0			
KPAL03F522...	2,2		44	50
KPAL03F527...	2,7			
KPAL03F530...	3,0			
KPAL03F533...	3,3		40	70
KPAL03F539...	3,9			
KPAL03F540...	4,0			
KPAL03F547...	4,7		44	70
KPAL03F556...	5,6			
KPAL03F560...	6,0			
KPAL03F568...	6,8		50	70
KPAL03F582...	8,2			
KPAL03F590...	9,0			
KPAL03F610...	10,0	76	70	
KPAL03F615...	15,0			
KPAL03F618...	18,0			
		86	70	
		96	70	
		86	125	
		96	125	
		96	180	

Istnieje możliwość uzgodnienia innych pojemności oraz długości i rodzaju wyprowadzeń.
Other capacitance values and terminal lengths and types can be agreed upon request.

AUDIOMIFLEX

(+48) 509 85 30 10
audiomiflex.pl